

Specifications

Model: SV7QLCD-S

Size 7" TFT-LCD Monitor w/Quad screen

Panel Innolux Digital New Panel

Aspect ratio 16:9

Resolution 800xR.G.Bx480

System PAL/NTSC auto switching

Video/Audio in 4 video inputs & 1 audio input

Speaker yes

Trigger Function 4 trigger inputs, 1 for each video channel

Power range DC 9-32V

Display mode full/2/3/4 images adjustable

SV7QLCD-S

Heavy Duty High Resolution 7" LCD Monitor



Warranty

TECHNICALSUPPORT

For Technical Support please contact your local distributor.

LIMITEDWARRANTY

This product is supplied with a 1 Year warranty. The Warranty excludes products that have been misused (including accidental damage) and damage caused by normal wear and tear. In the unlikely event that you encounter a problem with this product, it should be returned to the place of purchase.

BEFORE YOU BEGIN

- Please unpack the box carefully and identify that all the parts are present.
- The monitor is suitable for indoor applications like car rear vision or CCTV surveillance system.
- Make sure you use the recommended power input. Damage caused to the monitor by incorrect voltage is not covered by the warranty.
- Do not attempt to open the casing to access the monitor. Damage caused to the monitor by tampering with the monitor casing is not covered by the warranty.


WARNING: SmartWitness installations should be performed by a qualified individual or installation professional only. Working with a vehicle's power system can be dangerous to both you and your vehicle. This installation is intended only to be a guide since vehicle designs and power/input sources can vary significantly from vehicle to vehicle.

Product Description




- 1 Sun shade
- 2 LCD monitor
- 3 Gasket
- 4 Adjustable tilt screw
- 5 Split image switch
- 6 Menu navigation
- 7 Menu button
- 8 Menu navigation
- 9 Mode button
- 10 Power button
- 11 Bracket mount

Remote Control





- 1 Power
- 2 Up
- 3 Function decrease
- 4 Down
- 5 Function increase
- 6 MENU
- 7 Split image switcher
- 8 Single Video Channel selection

Wiring Connection


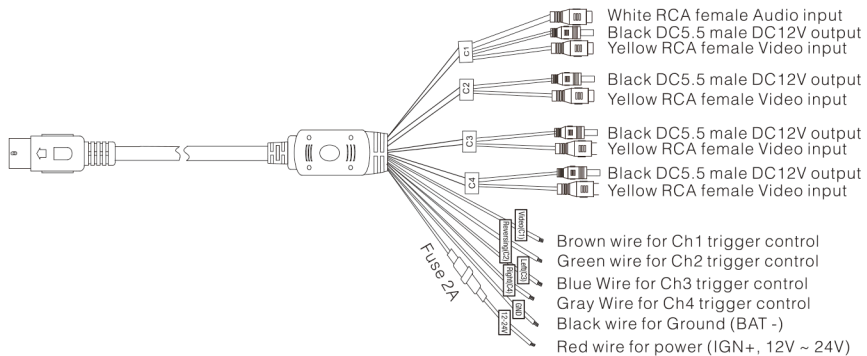


Monitor Standard Installation



- 1 Remove the adjustable tilt screw completely and remove the monitor from the U Bracket. Place the U bracket to the desired mounting location and prepare the 3 bracket screws



- 2 Secure the bracket with the 3 included screws. Then place the LCD monitor into the bracket and secure again with the adjustable tile screws



- 3 Adjust the LCD monitor angle by loosening the tilt screws and setting your desired angle. The LCD can be tilted a maximum of 30°, frontward or backward. Tighten tile screws to set the angle



Included Accessories


Remote control x 1 PCS



User manual x 1 PCS



Power cable x 1 PCS



Sun shade x 1 PCS



Bracket Accessories x 1 PCS

